Whirlpool Bathtub

Instructions of installation and use





1800*900*610MM (Single Seat)

1800*1200*610MM (Double Seat)

Honoured users:

Welcome to buy bathtub series handled by our company. For your safty, please read the instruction carefully before installation and using of the bathtub.

Content:

1 Preparations	2
2 Installation process	3
3 Instruction of using our products	4
4 Cleaning & Maintaining	8




1800*900*610MM (Single Seat)

1800*1200*610MM (Double Seat)

1. Preparations

A-1 Check the products and accessories inside the package. Only 1 package as below picture Shows.







(Including

1.Pillow 2.Waste Pipe 3.Shower Hose 4.Showerhead 5.Connection 6.Drain Plug 7.Wahser)


A-2 Tear off the protection plastic cover bathtub as the pic shows:



A-3 Bathtub Drawing

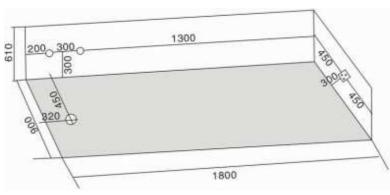

1800*900*610MM

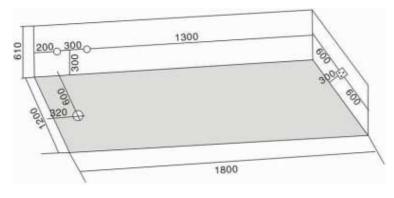

1800*1200*610MM

2. Installation process

A-1 Take out bathtub accessories for installation as pic. Shows



A-2 Installation of Drain Plug



A-3 Installation of Showerhead

(I) Connect the shower hose to the white pipe with the brass connection.





(II) Installing Showerhead



A-4 Installation of Waste Pipe




A-5 Installation of Pillow



3. Instruction of using our products

-----Computer Panel Usage

I) Instruction of control panel



- 1) Water Pump Surf
- 2) Blower
- 3) Thermostatic Heating
- 4) Lock
- 5) Under Water Light
- 6) Ozone Sterilization

- 7) + adjusting plus
- 8) TUN Frequency button
- 9) FM radio or CD button
- 10) adjusting minus
- 11) VOL Volume button
- 12) Power ON/OFF Button



- 1) Blower
- 2) Water Pump Surf
- 4) Lock
- 5) Ozone
- 6) MEM Station Storage/Select

- 7) Volume Minus
- 8) VOL+ Volume Plus
- 9) AUDIO FM (or MP3) Switch
- 10) TUN- Frequency Minus
- 11) TUN + Frequency Plus
- 12) Power

II) Operation instruction and direction

1 "D" Power ON/OFF Button

Push down the switch, the controller is open, its status light is on and other function can be used only when power is ON.

When the system is on, press the icon, FM function starts, press again, MP3 function is on, press Another time, MP3 function stops.

3 "TUN, VOL , +, -," Volume Minus/ Plus; Frequency Minus/Plus

Press VOL+、 VOL-to adjust volume higher and lower

Press TUN+、 TUN-to change frequency.(The FM frequency scope is 87.5MHz—108.0MHz.)

4. "Under Water Light

Press light button to turn on underwater light to lighten the bathtub, press again to power off

If no operation with the control panel for 5 minutes, all the keys will be locked except ", LCD displays "LOCK".

When the keys were locked, press "for 3 seconds, the keys will be unlocked after a "di..." icon "LOCK" disappear.

When the keys were unlocked, press" for 3 seconds, the keys will be locked after a "di...", LCD displays "LOCK".

When the system is on, press this button to start the blower, press again to power off.



- 7.1 The water checking device of this controller protects the water pump from burning out.
- 7.2 Press this button to start the pump. When the water level lower than the setting value, pump stops working, When the water level achieves the setting value, pump starts working
- 7.3When the pump is working, press this button to stop the pump, and thermostatic heating function is stopped(if the thermostatic heating is on).

Press this button for 2 seconds, the ozone function starts and works for 10 minutes and then stops; or press twice to stop the function.

- 9. "///" Thermostatic Heating
 - 9.1 This Function works only when the water pump surf function is on.
 - 9.2 Press button to start the function, and press" + " or " "to adjust the temperature. (Temperature setting range: 35° C-- 45° C).
 - 9.3Thermostatic heating function starts or stops according to the temperature (the temperature that the system defaults is 37° C):

Controlling rule is as follows:

If the temperature \geq setting temperature $+1^{\circ}\mathbb{C}$, stop heating; If the temperature \leq setting temperature $-1^{\circ}\mathbb{C}$, start heating.

- 10. " MEM" Station Storage/Select
- 10.1 Station storage: when FM function is on, press " MEM "to store station frequency into selected location according to the instruction.
- 10.2 Station select: When FM Function is on, press" [▶] E [▶] "to select stored station frequency.

4. Cleaning & Maintaining

- 1. Cleaning with liquid scour and soft cloth caution: acetone, ammonia, carbinol, formyl, formaldehyde etc are forbidden.
- 2. If there are some scratches on the surface, polishing them with 2000#sandpaper, then plaster some toothpaste and use soft cloth to keep the whirlpool shining.
- 3. Exterior furring can be removed by acid scour and soft cloth, you'd better use hot citric acid, vinegar for clean.
- 4. If you find the overflow and drain are blocked by dirties, screw it off and clean.
- 5. Gold and chrome finished accessories don't need much wiping.
- 6. Don't clean the bathtub with rough tools or detergent with chemicals solvents.
- 7. When you finish using the bathtub, drain and power off.
- 8. Don't hammer and carve the bathtubs with blunt object or some thing very sharp.
- 9. Filling the whirlpool fully with 40°C warm water for whole whirlpool clean, mixed with 2g scour and start the massage power for about 5 minutes, switch and drain, then filling cold water fully and start the massage power for about 3 minutes, drain and whirlpool clean finished.

5. Safety Guide

- 1. Whirlpool should be installed by professional worker, or we will not responsible for it
- 2. Electrical source parameter should according to national standard, such as including creepage protecting switch. Pay attention to the switch, the electric outlet and the Electric wire are all waterproof.
- 3. Don't use over hotted water, and obey the rules: cold water first, hot water next. Do not power on unless the water covers the jets.
- 4. We allowed 220V standard for the bathtub. Do not power on, if the voltage=235V or =190V.
- 5. Make sure you power off after using the bathtub.